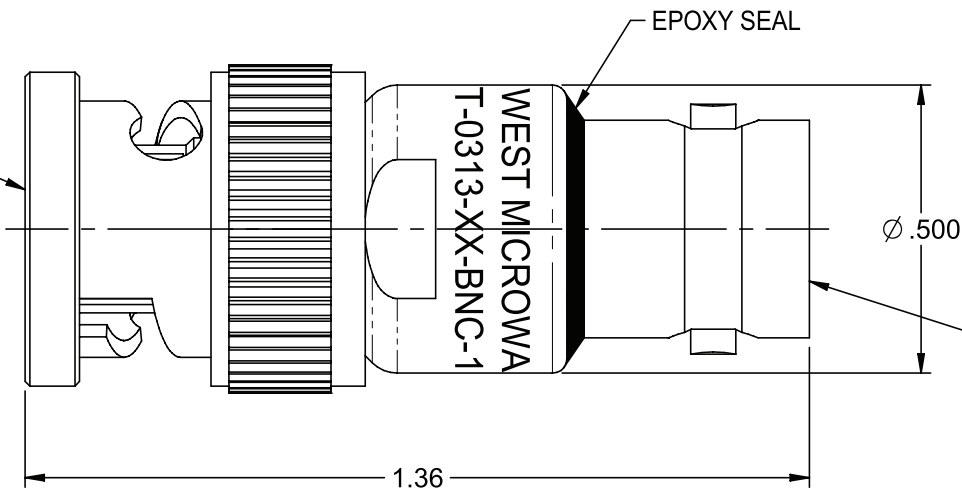


BNC MALE CONNECTOR  
PER MIL-STD-348  
FIGURE 301-1





BNC FEMALE CONNECTOR  
PER MIL-STD-348  
FIGURE 301-2

NOTES: UNLESS OTHERWISE SPECIFIED.

1. SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC TO 4.0 GHz
- 1.2 ATTENUATION & ACCURACY:
  - 0 dB: +0.3/-0 dB
  - 1-6 dB: ±0.3 dB
  - 7-20 dB: ±0.5 dB
  - 21-30 dB: ±0.8 dB
- 1.3 IMPEDANCE: 50 OHM
- 1.4 VSWR (MAX): 1.25:1
- 1.5 MAXIMUM INPUT POWER: 2 WATTS AVG. AT 25°C  
DERATED LINEARLY TO 0.5 WATTS AT 125°C
- 1.6 OPERATING TEMP. RANGE: -55°C TO 125°C
- 1.7 FINISH: NICKEL PLATED BRASS.

 <small>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</small> <small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</small>	<small>3RD ANGLE PROJECTION</small> 	<b>Midwest Microwave</b>		
	<b>RoHS</b> <input checked="" type="checkbox"/> 2002/95/EC	Title: <b>BNC ATTENUATOR, 0-30 dB</b>		
	<small>UNLESS OTHERWISE SPECIFIED</small> <small>UNITS: INCH</small> .XX ±.02 .XXX ±.005 ANGLES ±2°	Model No. <b>ATT-0313-XX-BNC-10</b>		
	Size <b>A</b>	DO NOT SCALE DRAWING	Date: 5/8/2013	Sheet 1 of 1